


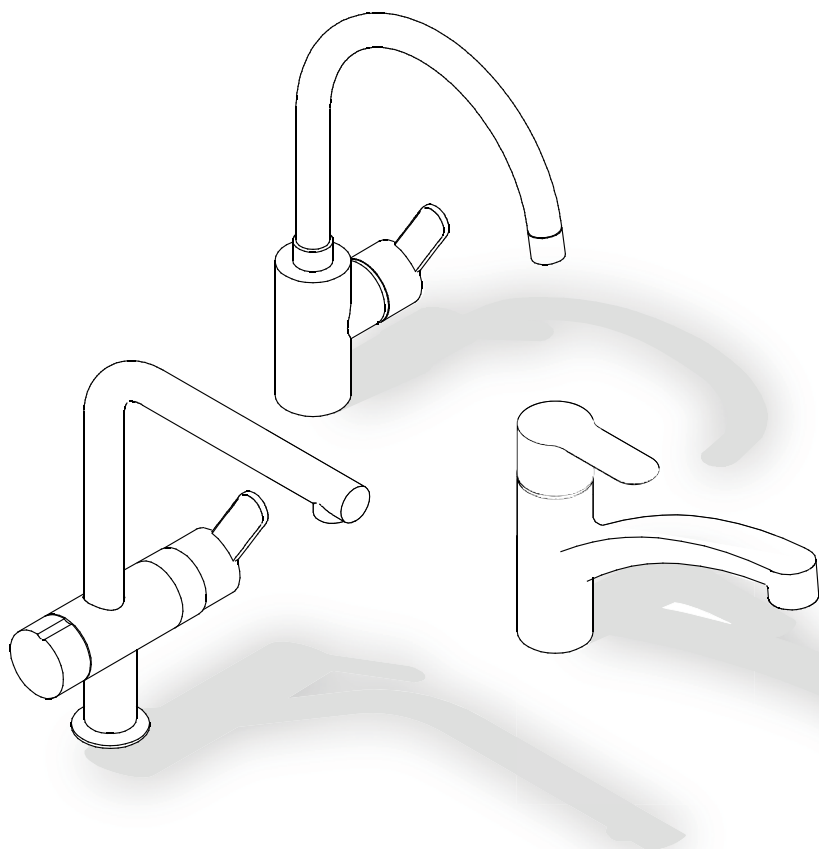


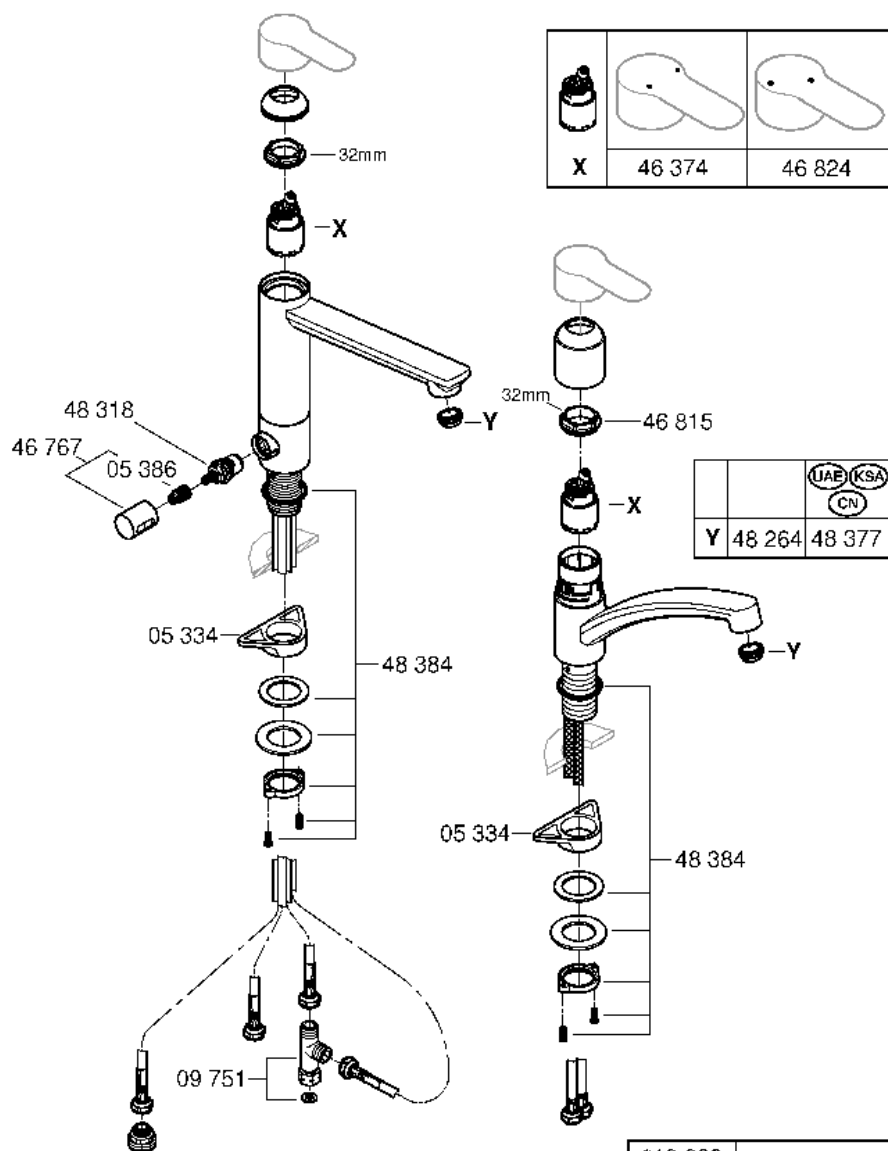

*

=





DIN EN
806

DIN EN
1717

DIN
1988





bar



°C

max. 10
0,5 5 1



max. 70°
60°

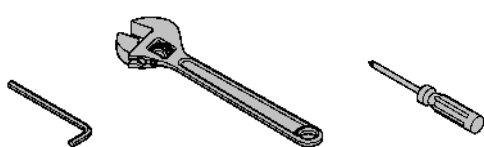


32mm
*19 332




1

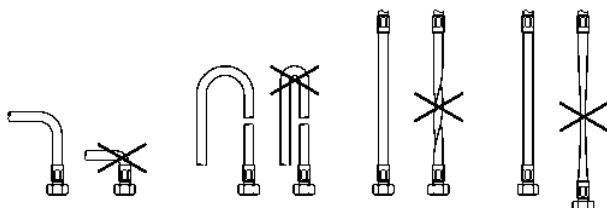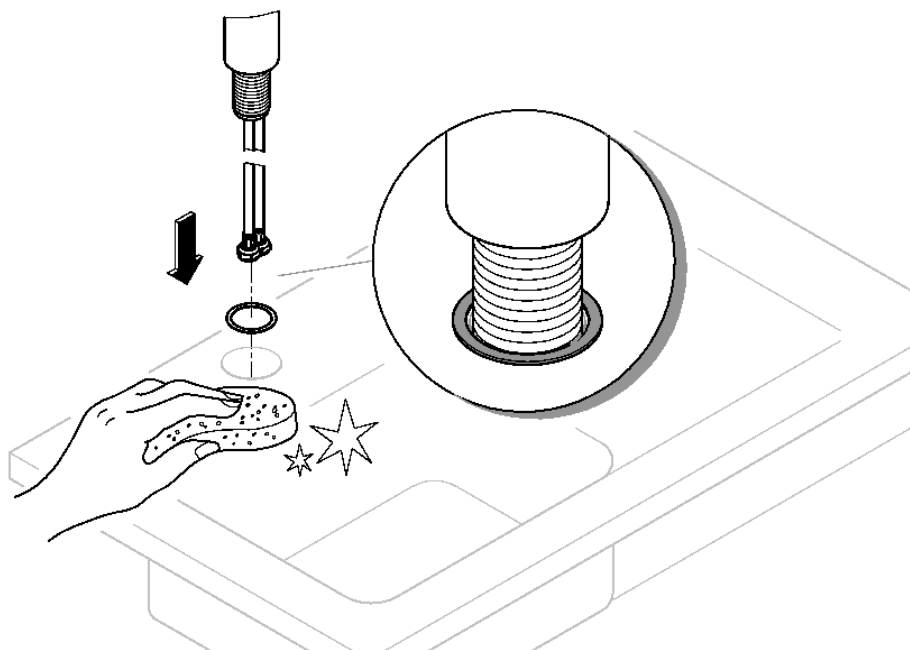




2


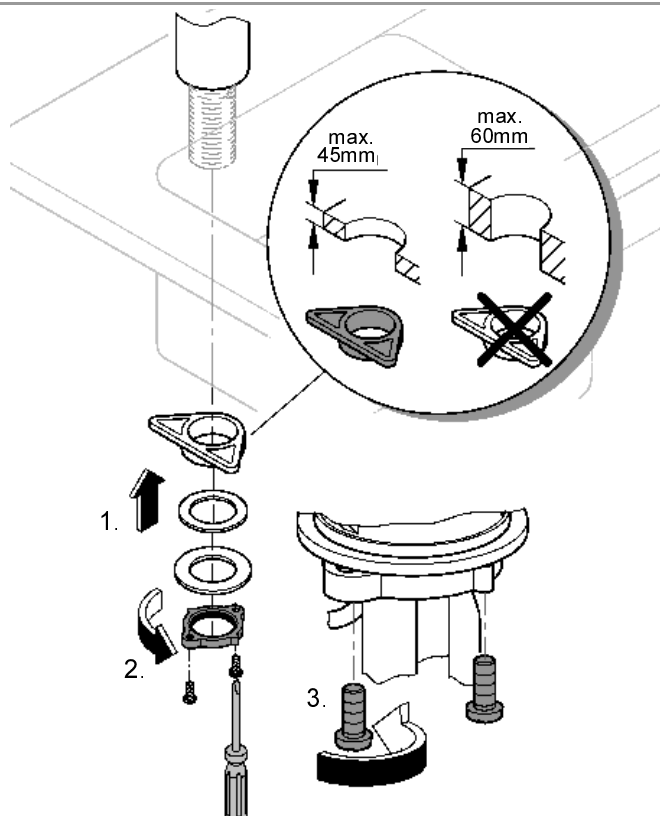


3a

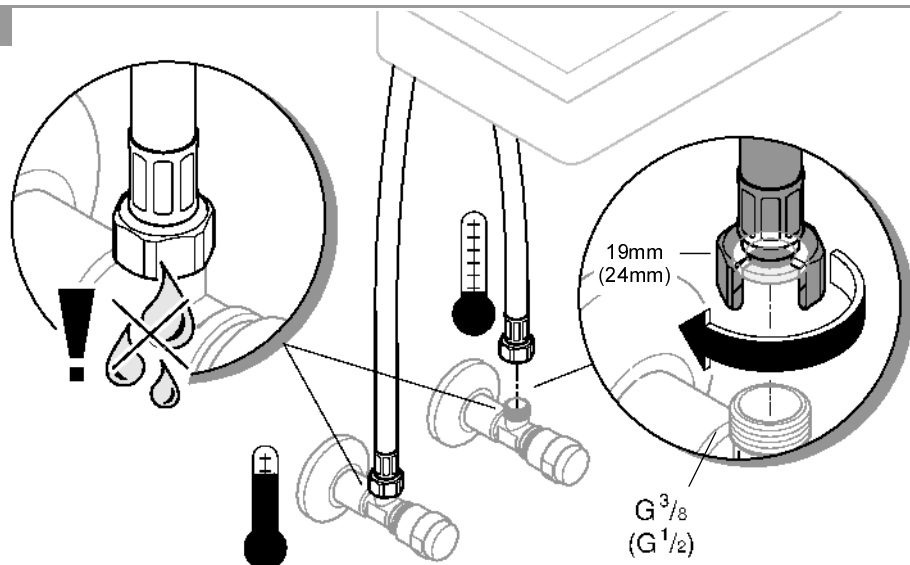





3b

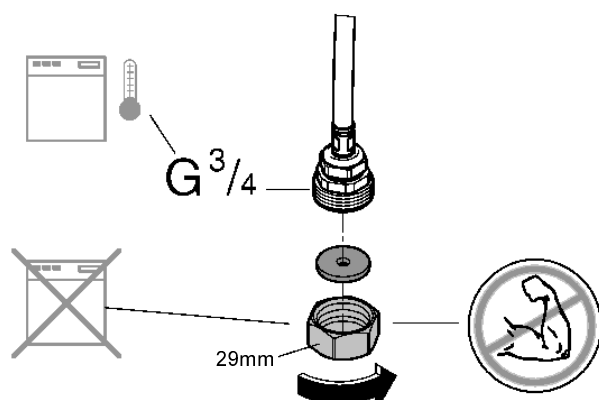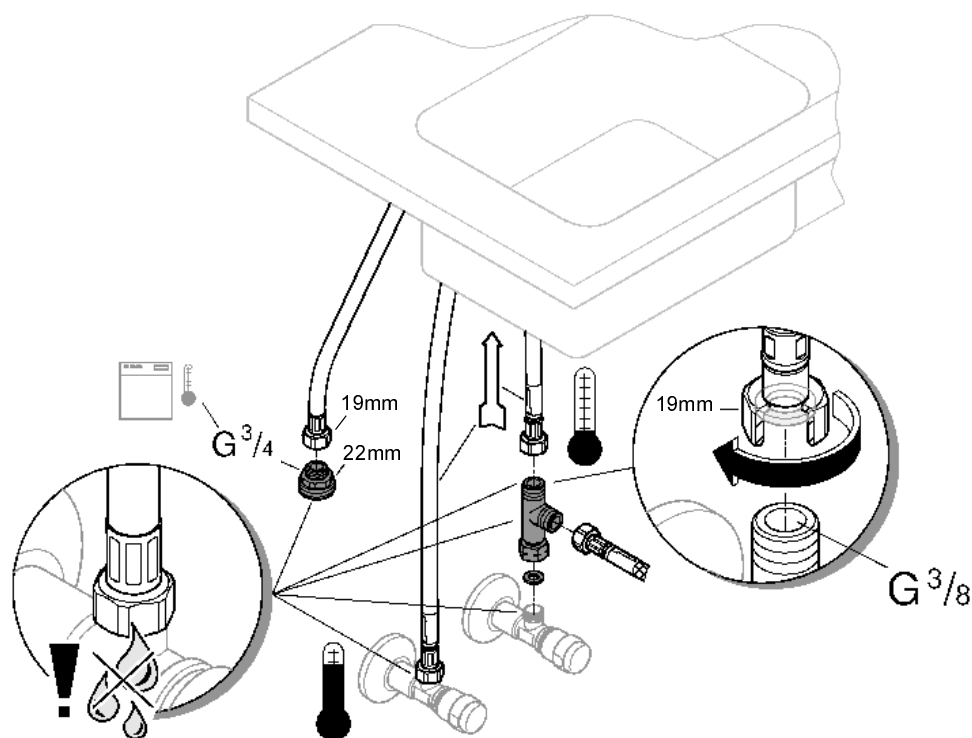









optional

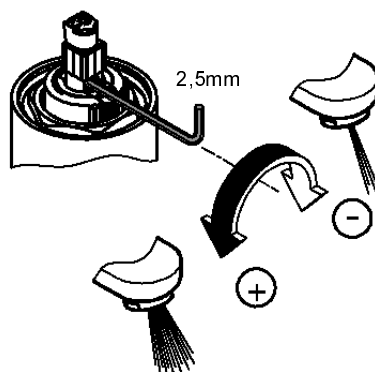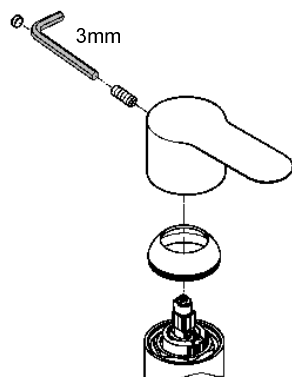

optional

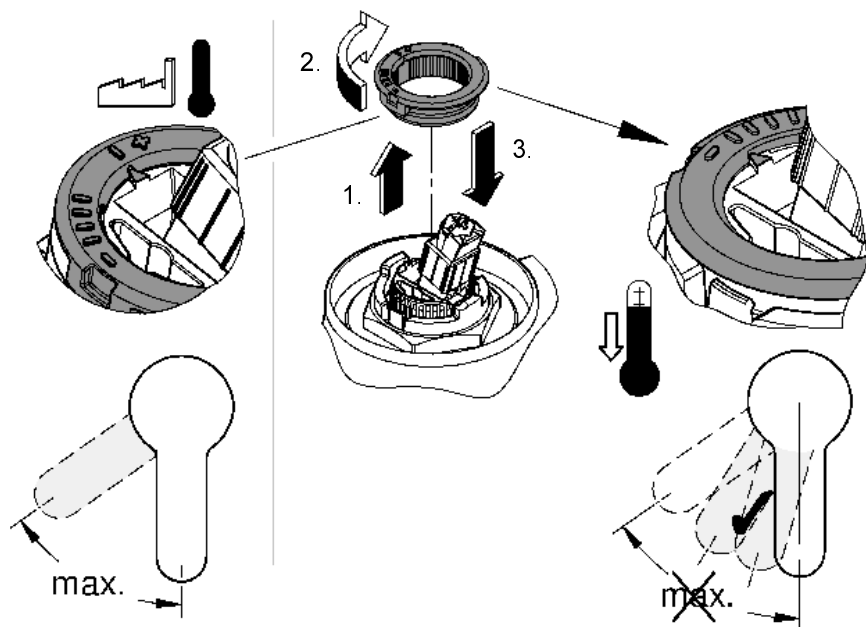

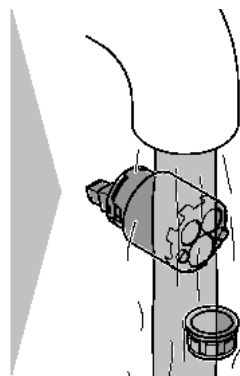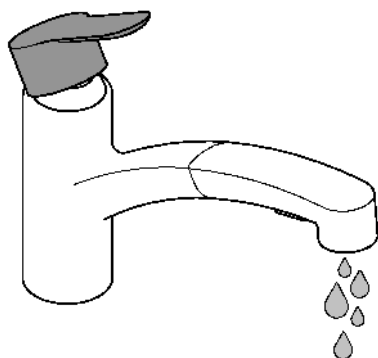

*19 332

max. 7Nm



32mm

max. 12Nm

